
SmartVision™ Track Condition Monitoring

Developed in collaboration with VR FleetCare



Real-Time Continuous Monitoring of Tracks and Track Assets from In-service Trains



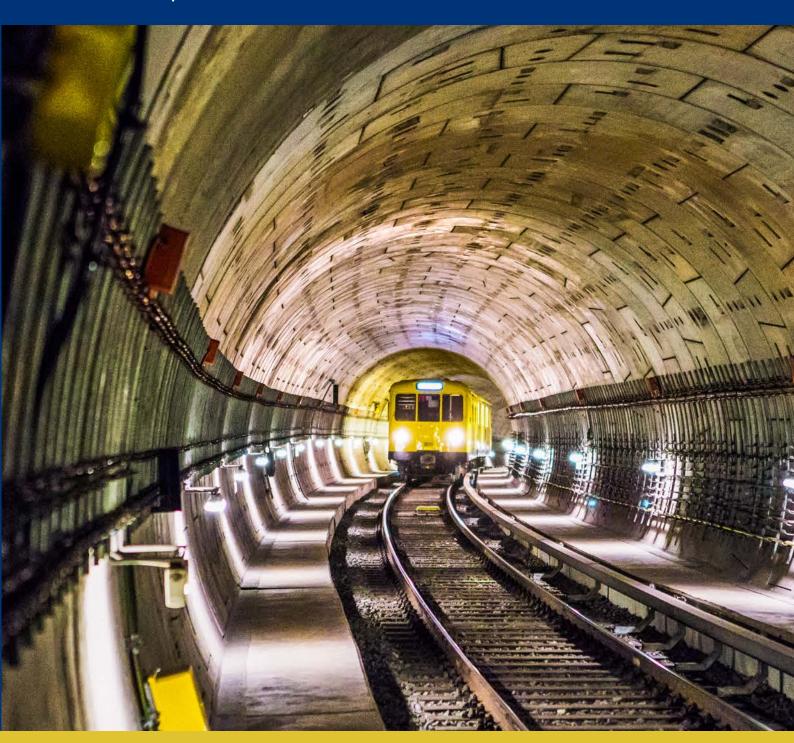





Real-Time Continuous Monitoring of Tracks and Track Assets from In-service Trains

EKE-Electronics, in collaboration with VR FleetCare, have developed a unique solution that uses sensor data from in-service rolling stock to provide real-time continuous monitoring of the condition of track and track assets.

SmartVision™ Track Condition Monitoring measures the smoothness of ride experienced by a normal in-service train passing in full load and with full speed over the track. These frequent measurements complement less frequently produced track geometry measurements from measurement trains. Sudden and quickly developing problems, such as broken rails or damage caused by wheel slip are detected. Early detection can result in cheaper cost of repair and reduces the risk of secondary damage.

A key enabler for the condition monitoring of track assets is the SmartVision™ Rail Asset Database. This records the type and location of track assets so that the degradation of the asset's condition can be followed. The user receives notifications of critical changes so that the correct action can be taken in the correct location at the correct time.

Field validation tests have been performed with our collaboration partner, VR FleetCare, to locate track irregularities, detect faulty insulation joints, monitor switch health and identify hunting.

We have an open data policy, giving you access to the measured data via the $SmartVision^{TM}$ user interface.

In order to benefit from Track Condition Monitoring, the measuring system needs to be installed on a selected number of in-service trains. EKE can support with the process to approach the train operator and help with installation planning and approvals with the support of VR FleetCare.





Added Value from SmartVision™ Track Condition Monitoring



Increase line availability by reacting quickly to SmartVision™ warnings about sudden and quickly developing problems, such as wheel slips and squats.



Improve safety by using frequent measurements about track asset condition to complement less frequent track geometry measurements and identify critical faults such as broken rails.



Efficient maintenance management by transitioning to condition-based maintenance.




Make cost savings by enabling repair to faults before secondary damage is caused to the track or wheels.



Optimise asset life by following the condition of track assets to maintain based on the real need instead of repairing once broken or servicing based on schedules.



Easily assess the condition of your track assets instead of analysing curves with masses of measurement results.

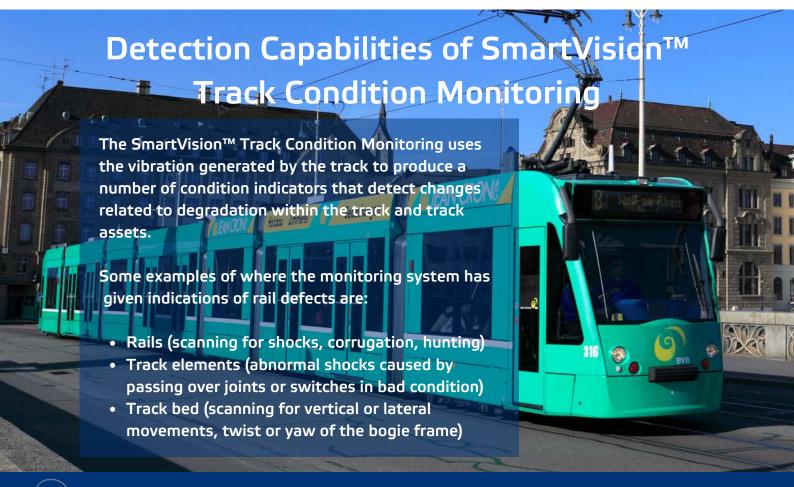




User Friendly Visualisation

SmartVision™ Track Condition Monitoring's easy-to-use web-based user interface turns data into actionable information to make informed business decision about when to perform maintenance based on the condition of your track and track assets. Our system allows you to view the status of your whole network in one place.

SmartVision™ Track Condition Monitoring increases line availability, helps avoid unexpected faults and enables transition towards condition-based maintenance.

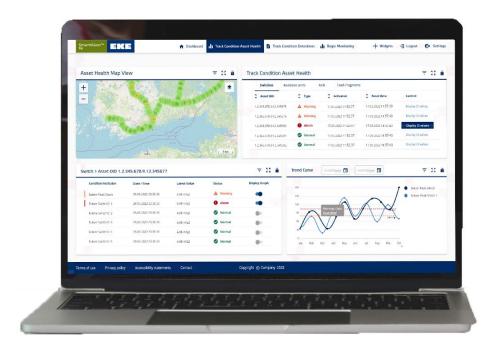


Our open data policy gives you access to the measured data via the SmartVision™ user interface. Users can download this data to enable further analysis using their own tools.

SmartVision™ is accessible via a standard web browser. EKE recommends performing user authentication via integration into the operator's single sign-on environment.






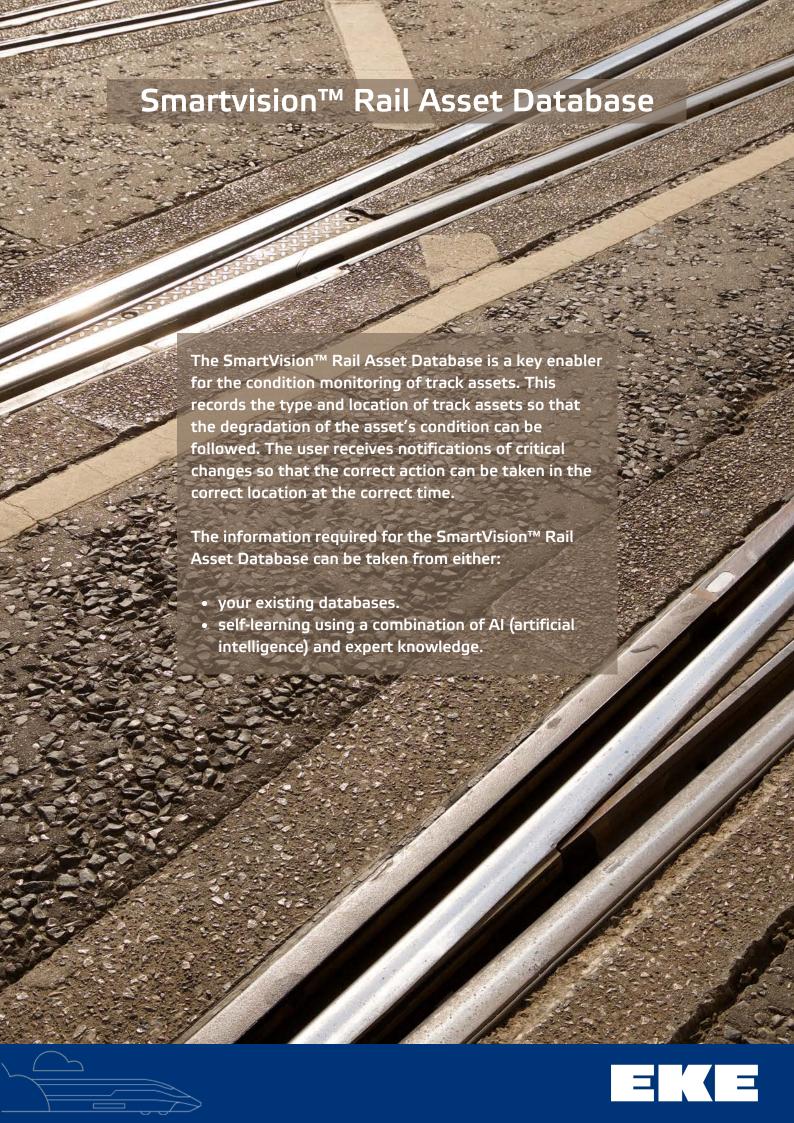

Onboard Data Acquisition

Data collection is performed by Televic Rail's industry leading COSAMIRA sensor gateway, equipped with signal processing software developed by EKE. It contains a central configurable processing and storage unit, and inertial measurement sensors.



The sensor gateway is installed on one bogie and performs continuous measurement of the track and movements of the bogie. It sends data of detected anomalies, as well as from defined track elements, to the SmartVision $^{\text{M}}$ cloud via wireless data transmission for further analysis.

The SmartVision™ Track Condition Monitoring system is made up of a standard configuration of:











Sensor Gateway

Sensors

Cabling

Router

Antenna

Access is required to a power supply (24/110 VDC). The optimal number of installations is dependent upon several factors such as train schedules, typical faults etc. Support can be provided for planning and installation.

No GPS? No Problem

We have a number of underground positioning solutions available.

- Soft Odometer. Algorithmic solution developed by EKE
- Tachometer at axle head
- Other tachometer solution e.g. eddie current or hall effect sensors
- Integration with Train Control and Management System (TCMS)
- Beacon-based positioning









smartvision@eke.fi



smartvision.fi



+358 9 613030

Follow Us





Copyright © EKE-Electronics Ltd. All Rights Reserved. Even partial copying is forbidden.



